


Wiring Diagram/接线图

| Capacity/量程(N) | H1 | H2 | D1 | D2 | D3 | C | M |
|----------------|------|----|----|------|----|----|----|
| 50~500 | 14.5 | 16 | 25 | 19 | 5 | 10 | M4 |
| 1K~10K | 14 | 16 | 32 | 25.4 | 8 | 16 | M5 |
| 20K~50K | 14 | 16 | 38 | 30 | 11 | 20 | M6 |
| 60K~120K | 22 | 25 | 51 | 41 | 15 | 30 | M8 |

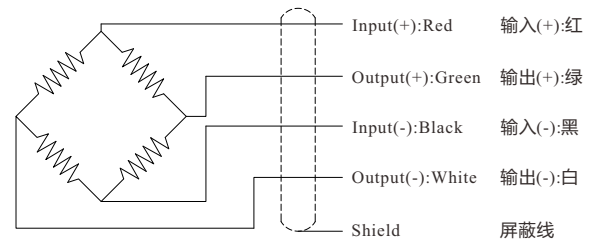

--- Specifications / 规格参数 ---

| Capacity/量程 | 0.1/0.2/0.3/0.5/1/1.2/2/3/5/10/12/20/30/50/60/100/120KN | | |
|---|--|-------------------------------|------------------------|
| Rated Output 额定输出 | 1.3~1.8mV/V | Compensated Temp. 温度补偿范围 | -10...+40°C |
| Excitation 激励电压 | 5~15V | Operating Temp. 工作温度范围 | -20...+60°C |
| Zero Balance 零点输出 | ±2% of R.O. | Temp. Shift Zero 零点温度漂移 | ±0.01% of R.O./°C |
| Nonlinearity 非线性 | ±0.5% of R.O. | Temp. Shift Span 灵敏度温度漂移 | ±0.01% of R.O./°C |
| Hysteresis 滞后 | ±0.5% of R.O. | Input Resistance 输入阻抗 | 385±30Ω |
| Nonrepeatability 非重复性 | ±0.2% of R.O. | Output Resistance 输出阻抗 | 350±3Ω |
| Creep(30min) 蠕变 | ±0.2% of R.O. | Insulation Resistance 绝缘阻抗 | >5000MΩ(50V) |
| Safe Overload 安全过载 | 150% of F.S. | Ingress Protection 防护等级 | IP65 |
| Ultimate Overload 极限过载 | 200% of F.S. | Material of Element 弹性体材料 | Stainless steel 不锈钢 |
| Cable 导线 | Ø3*2000mm 4-core shielded cable(Longer cable available) Ø3*2000mm 4芯屏蔽线 | | |
| R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程 | | | |

• Subject to change without notice / 如有更改,不另行通知