

Ordering code

FTK-500NM



Model

Capacity

Model	H	h1	h2	L	Material&Capacity(NM)	
					Aluminum	Alloy steel
FTK	90	15	33	30	50/100	200/300/500/1000
FTJ	155	20	65	53		



Wiring Diagram/接线图

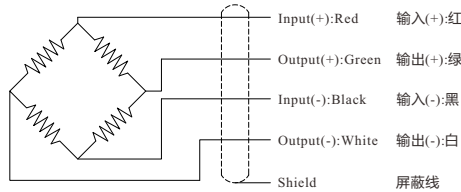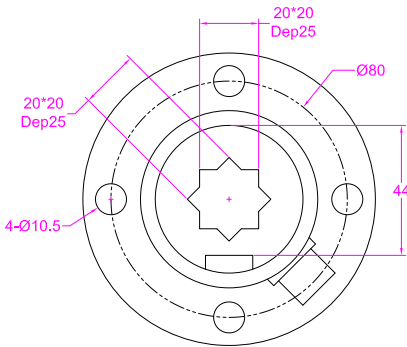

--- Specifications / 规格参数 ---

Capacity/量程	50/100/200/300/500/1000 NM		
Rated Output 额定输出	1.5 mV/V	Compensated Temp. 温度补偿范围	-10...+40°C
Excitation 激励电压	3~15V	Operating Temp. 工作温度范围	-20...+60°C
Zero Balance 零点输出	±2% of R.O.	Temp. Shift Zero 零点温度漂移	±0.02% of R.O./°C
Nonlinearity 非线性	±0.25% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.01% of R.O./°C
Hysteresis 滞后	±0.25% of R.O.	Input Resistance 输入阻抗	700±30Ω
Nonrepeatability 非重复性	±0.1% of R.O.	Output Resistance 输出阻抗	700±5Ω
Creep(5min) 蠕变	±0.05% of R.O.	Insulation Resistance 绝缘阻抗	>2000MΩ(50V)
Safe Overload 安全过载	150% of F.S.	Ingress Protection 防护等级	IP60
Ultimate Overload 极限过载	200% of F.S.	Material of Element 弹性体材料	≤100NM Aluminum ≥200NM Alloy steel
Cable 导线	Ø5.5*3000mm 4-core shielded cable with mating connector Ø5.5*3000mm 4芯屏蔽线		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知