
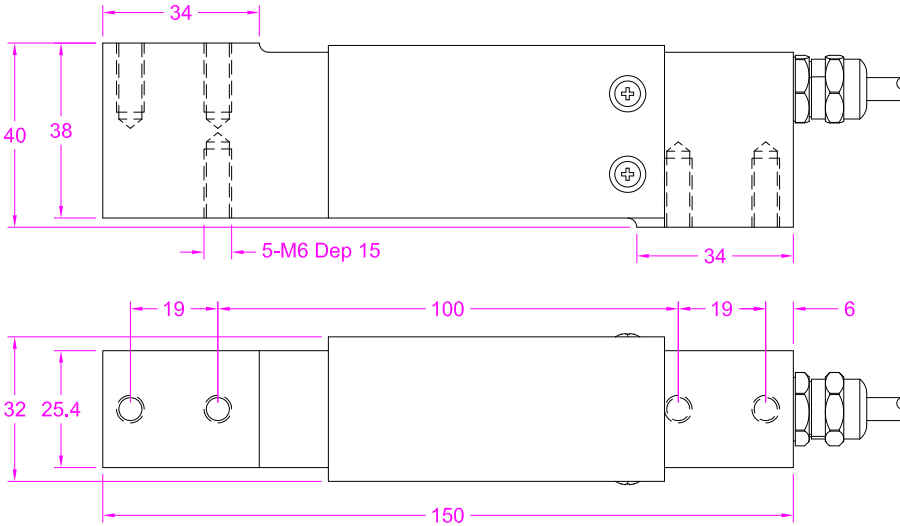


Load direction/加载方向
(Platform sizes up to 400x400mm)

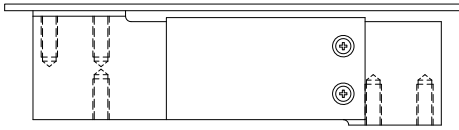


Ordering code

FHSP - 10kg

Model

Capacity

Wiring Diagram

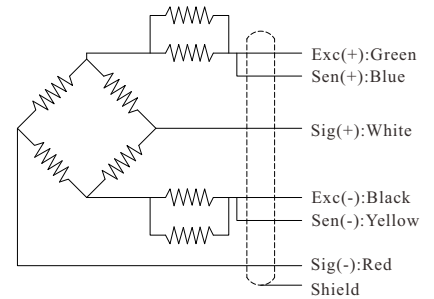

--- Specifications / 规格参数 ---

Capacity/量程	5/8/10/15/20/30/50/75/100/150/200 kg		
Rated Output 额定输出	2.0±10% mV/V	Compensated Temp. 温度补偿范围	-10...+40°C
Excitation 激励电压	3~15V	Operating Temp. 工作温度范围	-30...+70°C
Zero Balance 零点输出	±0.05 mV/V	Temp. Shift Zero 零点温度漂移	±0.017% of R.O./10°C
Nonlinearity 非线性	±0.018% of R.O.	Temp. Shift Span 灵敏度温度漂移	±0.012% of R.O./10°C
Hysteresis 滞后	±0.018% of R.O.	Input Resistance 输入阻抗	385±10Ω
Nonrepeatability 非重复性	±0.018% of R.O.	Output Resistance 输出阻抗	352±5Ω
Creep(30min) 蠕变(30min)	±0.018% of R.O.	Insulation Resistance 绝缘阻抗	>5000MΩ(50V)
Safe Overload 安全过载	150% of F.S.	Ingress Protection 防护等级	IP67
Ultimate Overload 极限过载	250% of F.S.	Material of Element 弹性体材料	Stainless steel 不锈钢
Cable 导线	Ø6*1000mm 6-core shielded cable Ø6*1000mm 6芯屏蔽线		
R.O.=Rated Output/额定输出 F.S.=Full Scale/满量程			

• Subject to change without notice / 如有更改,不另行通知